


ADD-ON DEVICE

Quickstart Guide

Alarm Keypad

Model No. KYP1300

What's inside:



1x Alarm Keypad




**2x Double-Sided
Tapes**



**Mounting
Accessories**

Broadband internet connection, iOS or Android phone and home router required.

Get to Know Your Device

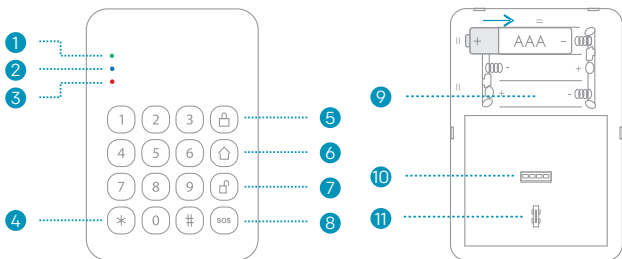

1. **Green LED**

Normal On :

Power on

2. **Blue LED**

Flashes Once :

Arm / Stay or Disarm

3. **Red LED**

Flashes Once :

Wrong programming

Flashes Once Every 3 Seconds :

Low battery indication, please replace the batteries.

4. Wake Up Key

5. Arm

6. Arm in Stay Mode

7. Disarm

8. SOS Key

9. Battery Slot

10. Wired Cables Interface


11. **Tamper Switch**

The tamper switch will be activated if case is opened

12. Screw Hole

13. Rear Cover

14. Wired Cables Interface



Step 1: Assemble your device and accessories

1. Unpack your device and accessories.
2. Pair the device with the Security Shuttle within 1-10 feet to make sure the connection is working well.
3. Pull and remove the plastic strip to initiate battery contact.



Step 2: Add a device

1. Open the app, tap on the menu button " ≡ " and select "Device Management".
2. Press the add button " + " next to Sensor List.
3. Follow the app instructions to scan the QR code located on the device.

Note: If the scan is incomplete, you will be asked to enter the serial number (SN) of the device.


Step 3: Mount your device

Before you mount your device, see if it's within Security Shuttle's range.

1. Take your device to the room you want to use it in.
2. Press "*" then "SOS" for 3 seconds, if you receive an notification saying "Emergency", you are within range.


Installation

1




Open the keypad case, fix the rear cover at the suitable mounting location.

2



Fasten the front cover on the rear cover.

3



Screw the bottom on.

Operation





Press "*" to activate keypad then enter **admin password #** or **user password #** before operating.



- **Admin password** is **123456** as default
- **User password** is **1234** as default

Note: If there is no operations within 5 seconds after pressing "*", keypad will exit setup state automatically.


| Function | Press Button |
|-------------|--------------|
| Arm | Press + + |
| Arm in Stay | Press + + |
| Disarm | Press + + |

| Function | Press Button |
|-----------------------|--|
| Mute | Press  button, then press  within 1 second to enter Siren Delay - "No Siren - Exclude Emergency Events" mode. |
| Unmute | Press  button, then press  within 1 second to cancel Siren Delay mode. |
| SOS Emergency Call | Press SOS for 3 seconds to activate an immediate alarm. |

Note: It is recommended to enable function of **"Emergency Call with Password"** to avoid false operation. See Settings.











Settings

Press **" * "** then enter **admin password # 9** to enter setting state. Blue LED will light up. Then insert your command.



- **Admin password** is **123456** as default.
- Keypad will be programmed successfully after one beep is heard.

Note: No operation within 30 seconds, keypad will automatically exit setup state.

| Function | Press Button | Mark |
|---------------------------------|---|--|
| Quick Arm On |  | Once enabled, users can press " * +  " to arm the system without password. |
| Quick Arm Off |  | — |
| Touch Tone On |  | — |
| Touch Tone Off |  | Once enabled, the green LED will flash when a button is pressed. |
| Emergency Call with Password |  | — |
| Emergency Call without Password |  | — |
| Change Admin Password |  | 6 digits |
| Change User Password |  | 4 digits |
| Arm Delay |  | (0-99s) |

Troubleshooting Tips

Are your devices listed in your app?

If you're having trouble installing your devices, see if they're listed in your app:

- Navigate to ☰ > **Device Management** to see if all your devices are listed.
- Tap + next to the device category and follow the on-screen instructions to add any missing devices.

Are your devices communicating with Security Shuttle?

- If your devices don't connect to Security Shuttle, they might be too far away. Take them to a location that's closer to Security Shuttle and try again.
- If they do connect, you'll know the range of your device and where to install a range extender.
- Alternatively, you can move Security Shuttle closer to your device.
- If your devices still don't communicate with Security Shuttle, even when they're in the same room, navigate to ☰ > **Device Management** > + on the app to add your devices again.

Reset to Default Settings

Press the Tamper Switch 5 times in a row, then you will heard one long beep.

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



99200307MIG

V1.0