











# DGM5937SVAT




 5MP	 H.265	 Starlight	 PoE	 WDR
 Human / Vehicle Detection	 20X Optical Zoom	 PTZ	 Auto Tracking	 MIC built-in

## AI-based 5MP H.265 20X Speed Dome IP Camera

### FEATURES

- **Starlight visibility** to offer clear & color images even at night
- Zoom lens of f4.7 ~ f94mm with **20X optical zoom**, suitable for various monitoring environments
- **AI-based human / vehicle detection** supported to avoid false detection alarms
- **PTZ control** with **Auto Tracking** for seamless monitoring:
- **ONVIF** standard supported to simplify system integration
- **POE (Power-over-Ethernet)** support to eliminate the use of power cables and reduce installation costs
- **Microphone built-in** for audio recording and **line out support** for audio broadcasting
- IR effective range **up to 120 meters** for night surveillance
- **WDR** to increase image recognizability in overexposure and dark areas
- **Remote Surveillance Compatible** with **Internet Explorer 6** and above, **Microsoft Edge** & **Google Chrome**

### DIMENSIONS

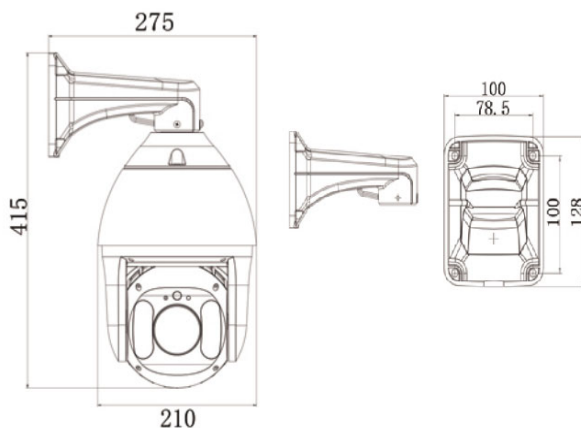

Dimensional tolerance: ± 5mm

## ○ SPECIFICATIONS

### ■ Device

Image Sensor	1/2.8" SONY CMOS
Max. Resolution	2560 x 1944
Lens	f4.7 ~ 94mm / F1.6 - F3.5
Viewing Angle	Tele 2.9° ~ Wide 64° (Diagonal)
Min Illumination	0.001 Lux (IR LED off), 0 Lux (IR LED on)
Shutter Speed	AUTO, 1/25s ~ 1/100000s
IR LED	8 units
IR Effective Distance	Up to 120 meters
Day / Night	YES
WDR Mode	YES (120dB)
RTC (real-time clock)	YES

### ■ Video

Compression	H265 / H.264	
Video Resolution	Main Stream	5MP (2592x1944) / 4MP (2560x1440) / 3MP (2304x1296) / 2MP (1080P) / 720P
	Sub Stream	D1 / VGA / 640x360 / 480x360 / CIF
Frame Rate	5MP @ 25FPS	
Video Profile	High profile / Main profile / Base profile	
Multiple Video Streaming	2 streams	
Bitrate Control	512Kbps - 12Mbps · VBR/CBR	
Image Enhancement	WDR / BLC / HLC / 2D DNR / 3D DNR / AWB / MWB / AGC	
Day / Night Switch	Auto / Color / (B/W) / Timing	
Forced Anti-flicker	YES	
Defog	YES	
White Balance	Auto / Manual	
Image Orientation	Rotate / Mirror	
Privacy Mask	YES	
Text Overlay	YES	
OSD Title	Location / font size / text configurable; text input (English & Chinese characters) and image upload (BMP) supported	

### ■ Audio

Microphone built-in	YES
Line out	YES
Encoding	G.711-u / G.711-a
Audio Adjustment	YES

### ■ Alarm & Event

Detection Mode	Motion / Human / Vehicle Detection with Auto Tracking
Detection Schedule	YES
Motion Detection Area	1x1, 2x2, 3x2, 3x3, 4x3, 4x4, 8x8, 16x16, 22x18
Detection Alert	Audio alert with customized mp3 audio file(s)

.\*The specifications are subject to change without notice.

**○ SPECIFICATIONS (CONTINUED)**

<b>■ Network</b>	
LAN Port	RJ45 connector x 1 / 4KV lightning-proof
LAN Speed	100Mbps Based-T Ethernet
Supported Protocols	HTTP / RTSP / FTP / SMTP / DHCP / NTP / NFS / RTMP
ONVIF Compatible	Onvif 17.06 compatible
Number of Online Users	6
Remote Access	Internet Explorer 6 and above (recommended), Microsoft Edge & Google Chrome
<b>■ PTZ Mechanism</b>	
Pan Range	360° continuous rotation
Pan Speed	0.5° ~ 60°
Tilt Range	-15° ~ 90°/s
Zoom Ratio	20X Optical Zoom
Auto Tracking	YES
Proportional Zoom	YES
Preset Points	Up to 255 preset points
<b>■ General</b>	
Web Interface Language	English, Traditional Chinese, Simplified Chinese, Russian, German, Italian, Turkish, Korean
Operating Temperature	-30°C ~ 60°C
Operating Humidity	10% ~ 90%RH
POE	IEEE 802.3at
Power Source (±10%)	PoE / DC12V
Power Consumption (±10%)	< 20 W
Net Weight (kg)	2.5
Casing	IP66
Minimum Web Browsing Requirements	<ul style="list-style-type: none"> <li>• Intel core i3 or higher, or equivalent AMD</li> <li>• 2GB RAM</li> <li>• AGP graphics card, Direct Draw, 32MB RAM</li> <li>• Windows 10, Windows 8, Windows 7, DirectX 9.0 or later</li> <li>• Internet Explorer 6 and above (recommended), Microsoft Edge &amp; Google Chrome</li> </ul>

\*The specifications are subject to change without notice.